


# APEX 110V.



110V APEX LED emergency maintained and non-maintained fire exit light ensures that the exit sign is always illuminated whilst the mains power supply is active if required. Ideal for wall or ceiling mounting in public rooms, corridors, hallways, walkways, stairwells, car parks, porches, basements etc

- ✓ 110V Operation for building sites
- ✓ Sticker Legend Kit with Up, Down, Left, Right arrows, blanks and running man
- ✓ 6500K, Daylight White
- ✓ 3+ hours emergency function
- ✓ Maintained or non-maintained dual function

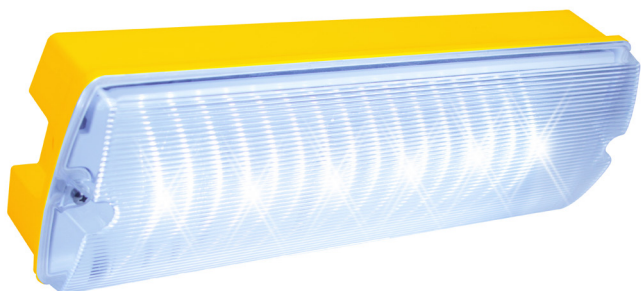

## Technical Specification

### Product Details

Range Variants	Emergency
Applications	Commercial or Semi-Commercial
Installation Options	Building Sites
UKCA & CE Compliant	Yes
RoHS Compliant	Yes
Guarantee Period	3 years (fitting), 2 years (battery)

### Construction

Case Material	Polycarbonate
Case Colour	Yellow
Diffuser Material	Polycarbonate
Diffuser Colour	Clear
IP Rating	IP65
Dimensions	70mm (h) x 360mm (w) x 110mm (d)
Weight	0.470 kg
Operating Temp (°C)	-20 to 45 °C

### Electrical Data

Voltage	110V AC
Frequency	50/60Hz
Wattage (illuminated)	4.5W
Battery Type	LiFePO4 battery
Battery voltage	3.2V 1000mAh
Emergency Wattage	3.0W
Emergency	Maintained & Non-Maintained
Battery Life	>3 hours
Earth Protection	Class II
Driver	Integrated
Dimmable	No

### LED Data

LED Type	SMD
LED Microchip	2835
Lumens	220 lm
Lumens per watt	49.0 lm/W
Lms in Emergency mode	130 lm
Colour Rendering Index	>=80 CRI
Colour Temperature	6500K (Daylight White)
Instantaneous Illumination	Yes: <1 second
LED Lifetime	25,000 hrs

## Product Family

sku	type	finish
SLBHEM5	110V IP65 Emergency Bulkhead	Yellow

## Dimensions

