


# RADNOR.

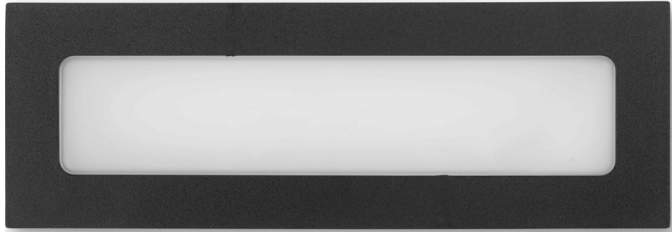

Surface Model BLS6CT2

RADNOR LED Brick lights are a perfect lighting fixture for outdoor areas and typically used in exterior settings such as garden walls, entrances, stairs, patios, or pathways.

- ✓ Surface or Recessed Installation
- ✓ CCT Switchable - 3000K, 4000K & 6500K
- ✓ IP65 Waterproof Rated
- ✓ Push Terminal Connector
- ✓ Suitable for Coastal Areas



2021 No. 1095



## Technical Specification

### Product Details

Range Variants	Surface / Recessed
Trim Options	Black
Applications	Semi-Commercial or Residential
Installation Options	Car Parks, Entrances, Pathways, Stairwells, and other Exterior Areas
UKCA & CE Compliant	Yes
RoHS Compliant	Yes
Guarantee Period	TBC

### Construction

Case Material	Polycarbonate
Case Colour	Black
Diffuser Material	Polycarbonate
Diffuser Colour	Frosted
Trim Colour Options	Black
IP Rating	IP65
Dimensions	See below
Weight	0.20 kg
Cable Entry	Surface: Rear cable entry
	Recessed: 8 x 20mm side knockouts
Operating Temp (°C)	-20 to 45 °C

### Electrical Data

Voltage	220-240V AC
Frequency	50/60Hz
Wattage	6.0W
Power Factor	0.9 pf
Earth Protection	Class II
Energy Rating	F
Dimmable	No

### LED Data

LED Type	SMD (Surface Mounted Diode)
LED Microchip	2835
Lumens	300 lm
Lumens per watt	60 lm/W
Colour Rendering Index	>=80 CRI
Colour Temperature	CCT Switchable 3000K, 4000K or 6500K
Beam Angle	120°
Instantaneous Illumination	Yes: <1 second
LED Lifetime	25,000 hrs


## Product Family

sku	type	dimensions	finish
<b>BLR6CT2</b>	Recessed	84mm (h) x 226mm (w) x 52mm (d)	Black
<b>BLS6CT2</b>	Surface	80mm (h) x 226mm (w) x 29mm (d)	Black




Recessed Model BLR6CT2

## Dimensions

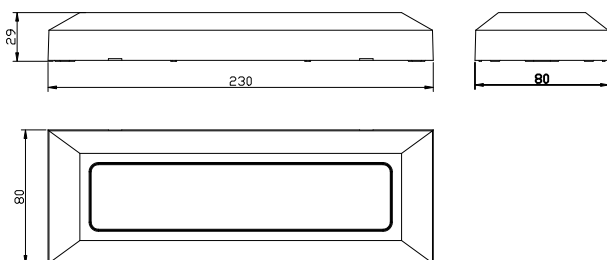

Surface Model BLR6CT2

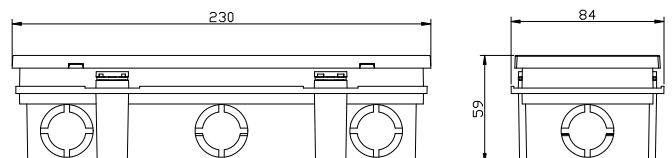

Recessed Model BLR6CT2